

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 713 344 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.05.1996 Bulletin 1996/21

(51) Int. Cl.⁶: H04Q 7/38

(21) Application number: 95117926.6

(22) Date of filing: 14.11.1995

(84) Designated Contracting States:
DE FR GB

(30) Priority: 15.11.1994 JP 280203/94

(71) Applicant: NEC CORPORATION
Tokyo (JP)


(72) Inventor: Ishii, Katsuhiro,
c/o NEC Corporation
Tokyo (JP)

(74) Representative: Glawe, Delfs, Moll & Partner
Patentanwälte
Postfach 26 01 62
80058 München (DE)

(54) Mobile radio communication system

(57) In response to a position registration request transmitted from a mobile telephone terminal 1a (or 1b), at least one base station 2₁ (or 2_N) selected by the mobile telephone terminal transmits a response signal to the mobile telephone terminal and measures a receiving electric field strength of the received response signal and a time between the transmission of the position registration request and the reception of the response signal. The mobile telephone terminal calculates a distance between it and the base station and a direction to the base station on the basis of the measured electric field

strength and the measured time and displays the results of calculation. The mobile telephone terminal reports the results of calculation to a central controller 4 through the base station and a control station 3 to store it in a portion of a subscriber information memory 5 corresponding thereto. The central controller 4 reads out a stored information from the subscriber information memory 5 in response to a notice request from the fixed telephone terminal 6 and notifies it to the fixed telephone terminal 6 to display it on a display device of the latter.

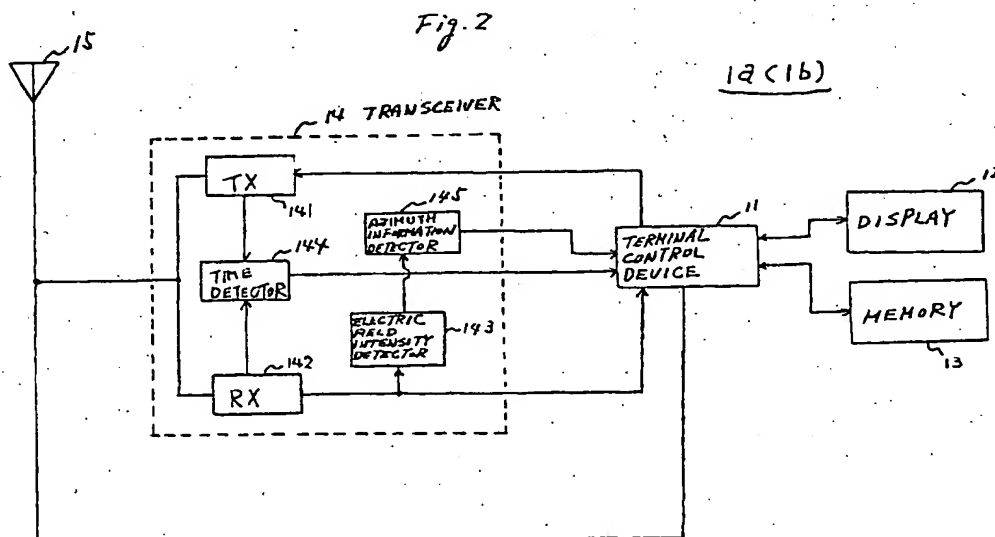

Description

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to a mobile radio telephone system and, particularly, to a mobile radio telephone system in which a service area is constructed with a plurality of base stations and a mobile telephone terminal performs a communication with one or more of the base stations, which are selected thereby, as the other side of the communication.

Description of the Related Art:

In a mobile radio telephone system, it is generally impossible for one side of a communication to determine a location of a mobile telephone terminal which is the other side of the communication since the latter terminal may move. In order to solve such problem, for example, Japanese Patent Application Laid-open Nos. H-328432 and S64-71226 disclose mobile radio telephone systems in each of which one side of a communication can know an area in which a mobile telephone terminal which is the other side of the communication is currently located.

In detail, the mobile radio telephone system disclosed in Japanese Patent Application Laid-open No. H5-328432, which will be referred to as "first prior art", hereinafter, is a cordless telephone system including at least one telephone connecting device for connecting a plurality of cordless telephone sets each having a display device. The mobile telephone system includes a position registration information memory portion and an inter-call processing portion and, when an inter-call is performed by one of the cordless telephone sets to another, the position registration information memory portion is referred to obtain a positional information of the connecting device used by the calling side cordless telephone set and the called side cordless telephone set and the positional information of the calling and called sides thus obtained is transmitted to the called side cordless telephone set and the calling side cordless telephone set as data to be displayed on display portions of the called and calling side cordless telephone sets, respectively, so that the positional information of one of the two cordless telephone sets is displayed on the display device of the other cordless telephone set, or vice versa.

On the other hand, the mobile radio telephone system disclosed in Japanese Patent Application No. S64-71226, which will be referred to as "second prior art", hereinafter, is provided on an exchanger side with a position display device for displaying a positional information of mobile radio telephone terminals. That is, in this mobile radio telephone system, the automatic position detecting function which is inherent to the mobile radio telephone system is utilized. The exchanger connected to a plurality of base stations through radio interface circuits stores positional information of respective mobile

radio telephone terminals existing in radio zones of the base stations and displays the information on the position display devices thereof.

Further, Japanese Patent Application Laid-open No. H1-297920 discloses a service system for informing a location of a mobile radio telephone in which an area in which a mobile radio telephone exists is informed by means of audio sound, which will be referred to as "third prior art", hereinafter.

However, in the first prior art, it is only possible to display the positional information of one of the cordless telephones on the display device of the other cordless telephone under the limited condition of the intercommunication between the cordless telephone sets. In the second prior art, it is impossible to display a position on the side of the mobile telephone terminal since the position display device is provided on the exchanger.

In any of the first, second and third prior arts, it is impossible for a mobile telephone terminal to confirm a position of a base station, a distance from the mobile telephone terminal to the base station and a direction of the base station looked from the mobile telephone terminal and to inform the distance and the direction of the base station related to the mobile telephone terminal to the other telephone terminal, although it is possible to confirm an area in which the mobile telephone terminal exists.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a mobile radio telephone system in which a mobile telephone terminal can confirm a position and direction of a related base station looked from the mobile telephone terminal and can inform the information to the other mobile telephone terminal.

A mobile radio telephone terminal according to the present invention includes a first detector circuit for detecting a distance between the mobile radio telephone terminal and a signal source transmitting a first signal to the mobile radio telephone terminal, a second detector circuit for detecting a direction of the signal source looked from the mobile radio telephone terminal and a display circuit for displaying a detected distance and a detected direction.

The mobile radio telephone terminal may further include a transmitter circuit for transmitting a second signal to the base station, a receiving circuit for receiving a third signal transmitted from the signal source in response to the second signal and a measuring circuit for measuring a time between transmission of the second signal and reception of the third signal, wherein the distance between the signal source and the mobile radio telephone terminal is detected by the first detector circuit on the basis of the time measured by the measuring circuit.

The receiving circuit is preferably a phased array antenna.

The mobile radio telephone terminal may further include a third detector circuit for detecting a receiving electric field strength of the third signal and an azimuth information generator circuit for generating an azimuth information on the basis of the receiving electric field strength, wherein the second detector circuit detects the azimuth information when the receiving electric field strength becomes maximum, as the direction of the signal source.

The transmitting circuit can transmit an information signal indicative of the distance and position to the signal source.

According to another aspect of the present invention, in a mobile radio telephone system in which an available service area is constructed by radio zones of a plurality of base stations and one mobile telephone terminal communicates with the other mobile telephone terminal through at least one base station selected by the one mobile telephone terminal, the mobile telephone terminal includes a first detector circuit for detecting a distance between the base station and the mobile telephone terminal, a second detector circuit for detecting a direction of the base station looked from the mobile radio telephone terminal and a display circuit for displaying the distance and the direction. The base station can receive an information signal indicative of the distance and the direction from the mobile telephone terminal and stores it.

Further, the base station gives a notice of the distance and direction related to the mobile telephone terminal to a fixed telephone terminal upon a position notice request from the latter. The base station may respond to the position notice request from the fixed telephone station after the base station receives a report enabling signal from the mobile telephone terminal.

According to the present invention, a method of controlling a mobile radio telephone terminal is provided, which includes the steps of detecting a distance between a signal source and the mobile radio telephone terminal, detecting a direction of the signal source looked from the mobile telephone terminal and displaying the distance and the direction. The control method may further include the steps of transmitting a first signal from the mobile telephone terminal to the signal source, receiving a second signal transmitted by the signal source in response to the first signal, measuring a time from the transmission of the first signal to the reception of the second signal and detecting the distance on the basis of the measured time.

The control method may further include the steps of detecting a receiving electric field strength of the second signal, generating an azimuth information on the basis of the receiving electric field strength and determining the azimuth information when the receiving electric field strength becomes maximum, as the direction of the base station.

The control method may further include the steps of detecting a receiving electric field strength of the second signal, generating an azimuth information on the basis

of the detected electric field strength and determining the azimuth information when the receiving electric field strength becomes maximum, as the direction of the base station.

In the control method of a mobile radio telephone system in which an available service area is constructed by radio zones of a plurality of base stations and one mobile telephone terminal communicates with the other mobile telephone terminal through at least one base station selected by the one mobile telephone terminal, the control method includes the steps of detecting a distance between the base station and the mobile telephone terminal, detecting a direction of the base station looked from the mobile telephone terminal and displaying the distance and the direction. The base station can receive an information signal indicative of the distance and the direction from the mobile telephone terminal and stores it. Further, the base station gives notice of the distance between the mobile telephone terminal and the base station and the direction of the base station looked from the mobile telephone terminal to a fixed telephone terminal upon a position notice request from the layer. The base station may respond to the position notice request from the fixed telephone terminal after the base station receives a notice enabling signal from the mobile telephone terminal.

In the present invention, the mobile telephone terminal calculates the distance between it and the base station and the direction of the base station looked from the mobile telephone terminal, displays them on the display circuit thereof and transmits an information of the calculated results to the base station. The calculated results received by the base station is stored in the memory circuit of the base station together with an information indicative of the received base station. The information stored in the memory circuit is read out upon the notice request from the fixed telephone terminal, transmitted to the fixed telephone terminal and displayed on the notice information display circuit thereof. Therefore, both the sending mobile telephone terminal and the receiving fixed telephone terminal can display the distance between the mobile telephone terminal and the base station and the direction of the base station looked from the mobile station on their display circuits, respectively.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features and advantages of the present invention will become more apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram showing schematically an embodiment of a mobile radio communication system according to the present invention;

Fig. 2 is a block diagram showing an internal construction of a mobile telephone terminal of the mobile radio communication system shown in Fig. 1;

Fig. 3 is a block diagram showing an internal construction of a fixed telephone terminal of the mobile radio communication system shown in Fig. 1;

Fig. 4 shows an example of a content stored in a subscriber information memory device shown in Fig. 1; and

Fig. 5 is a sequence diagram showing operations of the respective constitutional components of the mobile radio communication system shown in Fig. 1.

In the drawings, the same reference numerals denote the same structural components.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the present invention will be described in detail. Fig. 1 shows a construction of an embodiment of a mobile radio telephone system according to the present invention. As shown in Fig. 1, the mobile radio telephone system includes mobile telephone terminals 1a and 1b, base stations 2₁ to 2_N, a control station 3, a central controller 4, a subscriber information memory device 5, telephone terminals 6 and a public network 8.

The N base stations 2₁ to 2_N, where N is an integer larger than 1 are connected to the common control station 3 which is in turn connected to the central controller 4 and each of the base stations performs a radio communication with at least one mobile telephone terminal when the latter exists in one of radio zones (cells) 7₁ to 7_N, which is covered by the base station, under control of the central controller 4. In the example shown in Fig. 1, the mobile telephone terminals 1a and 1b exist in the radio zones 7₁ and 7_N, respectively.

The central controller 4 functions to write information of subscribers in the subscriber information memory device 5 and to read it therefrom on demand. The central controller 4 is connected to the telephone terminals 6 through the public network 8, although only one telephone terminal 6 is shown in Fig. 1, and functions to transmit audio signals from the telephone terminals 6 to the control station 3 and an audio signal from the control station 3 to the telephone terminals 6 through the public network 8. The telephone terminals 6 are fixed telephone terminals.

The mobile telephone terminals 1a and 1b are identical in construction and Fig. 2 is a block diagram of an embodiment of the mobile telephone terminal. In Fig. 2, the mobile telephone terminal 1a (or 1b) is composed of a terminal control device 11, a display device 12, a memory device 13, a transceiver 14 and an antenna 15. The terminal control device 11 is featured by that it can calculate a distance between the mobile terminal and the base station associated therewith and a direction of the base station looked from the mobile telephone terminal, on the basis of a receiving electric field strength and a delay time as to be described later.

The antenna 15 is preferably a phased-array antenna capable of maximizing a gain of radio wave coming in a specific direction determined by an azimuth information supplied from the terminal control device 11.

The transceiver 14 is composed of a transmitter portion 141, a receiver portion 142, an electric field strength detector portion 143, a time detector portion 144 and an azimuth information detector portion 145.

Fig. 3 is a block diagram of an embodiment of the fixed telephone terminal 6. In Fig. 3, the telephone terminal 6 has a known construction including a terminal control device 21, a display device 22 and a memory device 23. The terminal control device 21 controls operations of the display device 22 and the memory device 23. A handset of the telephone terminal 6 is included in the terminal control device 21.

The subscriber information memory device 5 (Fig. 1) stores an information having such content as shown in Fig. 4. That is, the subscriber information memory device 5 has M records 31₁ to 31_M for respective M subscribers of the mobile radio telephone system.

The M records 31₁ to 31_M are composed of M blocks 32₁ to 32_M for storing subscriber names or information related to the subscribers such as telephone numbers thereof, M blocks 33₁ to 33_M for storing a calling subscriber position notice enabling information, M blocks 34₁ to 34_M for storing information indicative of base stations positioned at centers of radio zones in which the subscriber terminals, that is, the mobile telephone terminals, exist, M blocks 35₁ to 35_M for storing information indicative of distances between the base stations and the mobile telephone terminals and directions of the base stations looked from the mobile telephone terminals and M blocks 36₁ to 36_M for storing other information, respectively.

Now an operation of this embodiment will be described with reference to a sequence diagram shown in Fig. 5. In the cellular mobile radio telephone system having the service area constituted with the cells 7₁ to 7_N of the plurality of base stations 2₁ to 2_N, as shown in Fig. 1, it is assumed that the terminal control device 11 of the mobile telephone terminal 1a transmits a position registration request signal through its transceiver 12 and the antenna 13 (step 41).

Then, the base station 2₁ positioned at the center of the cell 7₁ in which the mobile telephone terminal 1a exists receives the position registration request signal and gives a notice of the fact that the mobile telephone terminal 1a exists in the cell 7₁ of the base station to the central controller 4 through the control station 3 (step 42).

The central controller 4 records the position of the mobile telephone terminal 1a in the calling terminal portion of the subscriber information memory device 5 (step 43). That is, assuming that the record of the mobile telephone terminal 1a in the subscriber information memory device 5 is that shown by the block 31₁ in Fig. 4, the subscriber information memory device 5 records an information indicative of the base station 2₁ in the block 34₁.

Thereafter, the base station 2₁ transmits a position registration end signal and a registered position signal of the mobile telephone terminal 1a to the latter (step 44). Upon the reception of these signals, the electric field strength detector portion 143 of the transceiver 14 of the mobile telephone terminal 1a detects the electric field strength thereof and the time detector portion 144 thereof detects a time after the transmission of the position registration request signal, that is, a delay time. On the basis of the detected electric field strength and the detected time delay, the distance between the mobile telephone terminal 1a and the base station 2₁ and the direction of the base station 2₁ looked from the mobile telephone terminal 1a are calculated (step 45).

That is, as mentioned previously, the mobile telephone terminal 1a employs the phased-array antenna as the antenna 15 thereof and an azimuth information detected by the azimuth detector portion 145 is transmitted to the terminal control device 11, so that the antenna 15 can receive radio wave coming in any direction corresponding to an azimuth indication signal from the terminal control device 11.

By changing the azimuth indication from the terminal control device 11 in measuring electric field strength and delay time, it is possible to perform an omnidirectional measurement of electric field strength by means of the transceiver 14. The terminal control device 11 finally determines the direction of the base station 2₁ looked from the antenna 15 of the mobile telephone terminal when the largest electric field strength is measured.

Then, the terminal control device 11 of the mobile telephone terminal 1a stores the calculated distance and direction in the memory device 13 thereof together with the registered position signal of the mobile telephone terminal 1a (step 46) and then transmits the distance and direction to the base station 2₁ (step 47). The base station 2₁ supplies the received distance and direction to the central controller 4 through the control station 3 to store them in the block 35₁ of the subscriber information memory device 5 as shown in Fig. 4 (steps 48 and 49).

Thereafter, when the mobile telephone terminal 1a transmits the notice enabling signal allowing a notice of the calling subscriber to be sent (step 50), the notice enabling signal is received by the base station 2₁, supplied therefrom to the central controller 4 through the control station 3 and stored in the block 33₁ of the subscriber information memory device 5 shown in Fig. 4 (steps 51 and 52).

A user of the mobile telephone terminal 1a can arbitrarily display the information related to the position, distance and direction stored in the internal memory device 13 on the display device 12 according to a method to be described (step 53).

When a notice request signal requesting a notice of a calling terminal position is transmitted from the telephone terminal 6 connected to the public network 8 (step 54), the central controller 4 searches the subscriber information memory device 5 to find any one of the calling terminal position notice enabling blocks 33₁ to 33_M

which stores a record of notice enabling information. When there is any block having the record, an information of the position of the mobile telephone terminal, the distance between the latter terminal and the base station and the direction thereof are read out from the record and sent to the fixed telephone terminal 6 (step 55). In response to the information sent, the fixed telephone terminal 6 displays the position of the mobile telephone terminal, the distance from the base station and the direction to the base station on the display device 22 thereof according to a method to be described later (step 56).

Now, the methods for displaying the information on the display device 12 and on the display device 22 will be described. A signal identifying one of the base stations 2₁ to 2_N which is involved in the communication with the mobile telephone terminal 1a or 1b may take in the form of [area code number + cell number] and the distance between the mobile telephone terminal and the base station and the direction to the base station looked from the mobile telephone terminal take in the form of numerical value signals, respectively.

Either the mobile telephone terminal 1a or 1b or the fixed telephone terminal 6, or both, can directly display these signals on the display devices 12 and 22 as numerical values. Alternatively, by providing a database for combining the numerical value signal in the form of such as [area code number + cell number] with an area name corresponding thereto and a database for combining the numerical value signal indicative of the direction with a compass direction such as [East-North-East] in the memory devices 13 and 23, it is possible to display a concrete name of location of the mobile telephone terminal 1a or 1b and the compass direction on the display devices 12 and 22.

As described, according to the present invention, the fixed telephone terminal 6 and the central controller 4 can know the position of the mobile telephone terminal 1a or 1b. This is particularly advantageous when the user of the mobile telephone terminal 1a or 1b is an old man or a child who is to be protected by someone to some extent. Further, it is possible for a user of the mobile telephone terminal to know his location with respect to the base station or to notify the other side of the communication his location and distance from the base station in an emergency. Further, since the fixed telephone terminal can know the location of the base station and the direction of the base station with respect to the mobile telephone terminal, it is possible for the fixed telephone terminal to preliminarily know a movement of the mobile telephone terminal to another cell.

Although the present invention has been described with the fixed telephone terminal 6 being one side of the communication with the mobile telephone terminal 1a as the other side, the present invention is not limited to such situation and applicable to communication between mobile telephone terminals through a base station or communication with a fixed telephone terminal and a

mobile telephone terminal, with the fixed telephone terminal being a calling terminal.

As described hereinbefore, since, according to the present invention, both a mobile telephone terminal and a destination terminal can display a distance between the mobile telephone terminal and a base station and a direction and location of the base station looked from the mobile telephone terminal, it is possible for the mobile telephone terminal to confirm the distance to the base station and the direction and location of the base station with respect to the mobile terminal as well as to enable the destination terminal to confirm the same.

Therefore, according to the present invention, it is possible for the mobile telephone terminal to give a notice of a location of a mobile telephone terminal to the fixed telephone terminal in an emergency, and it is possible for the fixed telephone terminal to preliminarily know a movement of the mobile telephone terminal to another cell and/or to monitor a location of the mobile telephone terminal a user of which is to be protected. Therefore, the applicability of the mobile radio telephone system is considerably improved.

While the present invention has been described with reference to specific embodiments thereof, it will be appreciated by those skilled in the art that numerous variations, modifications and embodiments are possible, and, accordingly, all such variations, modifications and embodiments are to be regarded as being within the spirit and scope of the present invention.

Claims

1. A mobile radio telephone terminal comprising:
 - first detection means for detecting a distance between said mobile radio telephone terminal and a signal source adapted to send a first signal to said mobile radio telephone terminal;
 - second detection means for detecting a direction of said signal source looked from said mobile radio telephone terminal; and
 - display means for displaying the distance and the direction.
2. A mobile radio telephone terminal claimed in claim 1, further comprising:
 - transmitting means for transmitting a second signal to said signal source;
 - receiving means responsive to said second signal for receiving a third signal transmitted from said signal source; and
 - measuring means for measuring a time period from the transmission of said second signal to the reception of said third signal,
 - wherein said first detection means detects the distance on the basis of the time period measured by said measuring means.
3. A mobile radio telephone terminal claimed in claim 2, wherein said receiving means comprises a phased-array antenna.
4. A mobile radio telephone terminal claimed in claim 3, further comprising:
 - third detection means for detecting a receiving electric field strength of said third signal;
 - azimuth information generating means for generating an azimuth information on the basis of the receiving electric field strength detected by said third detection means; and
 - control means for controlling said phased-array antenna on the basis of the azimuth information generated by said angle information generating means.
5. A mobile radio telephone terminal claimed in claim 4, wherein said second detection means detects the azimuth information when the receiving electric field strength becomes maximum, as the direction.
6. A mobile radio telephone terminal claimed in claim 5, wherein said display means displays the distance and the direction in the form of an area name and a compass direction, respectively.
7. A mobile radio telephone terminal claimed in claim 6, wherein said second signal is a position registration request signal for requesting a registration of position.
8. A mobile radio telephone terminal claimed in claim 5, wherein said transmitting means is adapted to transmit the distance and the location to said signal source.
9. A mobile radio telephone system in which an available service area is constituted with radio zones of a plurality of base stations and a mobile telephone terminal selects at least one base station and communicates with a fixed telephone terminal through the selected base station, said mobile telephone terminal comprising:
 - first detection means for detecting a distance between said mobile radio telephone terminal and said selected base station;
 - second detection means for detecting a direction of said selected base station looked from said mobile radio telephone terminal; and
 - display means for displaying the distance and the direction.
10. A mobile radio telephone system claimed in claim 9, wherein said mobile radio telephone terminal further comprises:
 - transmitting means for transmitting a first signal to said selected base station;
 - receiving means for receiving a second signal

nal transmitted from said base station in response to the first signal; and

measuring means for measuring a time period from the transmission of the first signal to the reception of the second signal.

wherein said first detection means detects the distance on the basis of the time period measured by said measuring means

11. A mobile radio telephone system claimed in claim 10, wherein said receiving means comprises a phased-array antenna

12. A mobile radio telephone system claimed in claim 11, wherein said mobile radio telephone terminal further comprises.

third detection means for detecting a receiving electric field strength of the second signal.

azimuth information generating means for generating an azimuth information on the basis of the receiving electric field strength detected by said third detection means, and

control means for controlling said phased-array antenna on the basis of the azimuth information generated by said azimuth information generating means.

13. A mobile radio telephone system claimed in claim 12, wherein said second detection means detects the azimuth information when the receiving electric field strength becomes maximum, as the direction

14. A mobile radio telephone system claimed in claim 13, wherein said display means displays the distance and the direction as an area name and a compass direction, respectively

15. A mobile radio telephone system claimed in claim 14, wherein the first signal is a position registration request signal requesting a registration of the position of said mobile telephone terminal

16. A mobile radio telephone system claimed in claim 13, wherein said transmitting means is adapted to transmit a signal indicative of the distance and the direction to said base station.

17. A mobile radio telephone system claimed in claim 16, wherein said base station receives and stores the signal indicative of the distance and the direction transmitted from said mobile telephone terminal

18. A mobile radio telephone system claimed in claim 17, wherein said base station responds to a calling position notice request from said fixed telephone terminal to transmit the distance and the position of said mobile telephone terminal to said fixed telephone terminal.

19. A mobile radio telephone system claimed in claim 18, wherein said base station responds to the calling position notice request when said base station receives a notice enabling signal transmitted from said mobile telephone terminal.

20. A control method for controlling a mobile radio telephone terminal, comprising the steps of:

detecting a distance between a signal source and said mobile radio telephone terminal;

detecting a direction of said signal source looked from said mobile radio telephone terminal; and

displaying the distance and the direction.

21. A control method claimed in claim 20, further comprising the steps of:

transmitting a first signal from said mobile radio telephone terminal to said signal source;

receiving a second signal transmitted from said signal source, in response to the first signal;

measuring a time period from the transmission of the first signal to the reception of the second signal; and

detecting the distance on the basis of the time period.

22. A control method claimed in claim 21, further comprising the steps of:

detecting a receiving electric field strength of the second signal;

generating an azimuth information on the basis of the receiving electric field strength; and

detecting the azimuth information when the receiving electric field strength becomes maximum, as the direction.

23. A control method claimed in claim 22, wherein the distance and the direction are displayed as an area name and a compass direction, respectively.

24. A control method claimed in claim 23, further comprising the step of transmitting a signal indicative of the distance and the position to said signal source.

25. A control method for controlling a mobile radio telephone system in which an available service area is constituted with radio zones of a plurality of base stations and a mobile telephone terminal selects at least one base station and communicates with a fixed telephone terminal through the selected base station, said mobile telephone terminal:

detects a distance between said mobile radio telephone terminal and said base station;

detects a direction of said base station looked from said mobile radio telephone terminal; and displays the distance and the direction.

26. A control method claimed in claim 25, wherein said mobile radio telephone terminal further:
transmits a first signal to said base station;
receives a second signal transmitted from said base station, in response to the first signal;
measures a time period from the transmission of the first signal to the reception of the second signal; and
detects the distance on the basis of the measured time period measured.
27. A control method claimed in claim 26, wherein said mobile telephone terminal further:
detects a receiving electric field strength of the second signal;
generates an azimuth information on the basis of the receiving electric field strength; and
detects the azimuth information when the receiving electric field strength becomes maximum, as the direction.
28. A control method claimed in claim 27, wherein said mobile telephone terminal further transmits a signal indicative of the distance and the direction to said base station.
29. A control method claimed in claim 28, wherein said base station receives and stores the signal indicative of the distance from said mobile telephone terminal and the direction looked from said base station.
30. A control method claimed in claim 29, wherein said base station notifies said fixed telephone terminal the distance and the direction, in response to a calling position notice request from said fixed telephone terminal.
31. A control method claimed in claim 30, wherein said base station responds to the calling position notice request when it receives a notice enable signal from said mobile telephone terminal.

Fig. 1

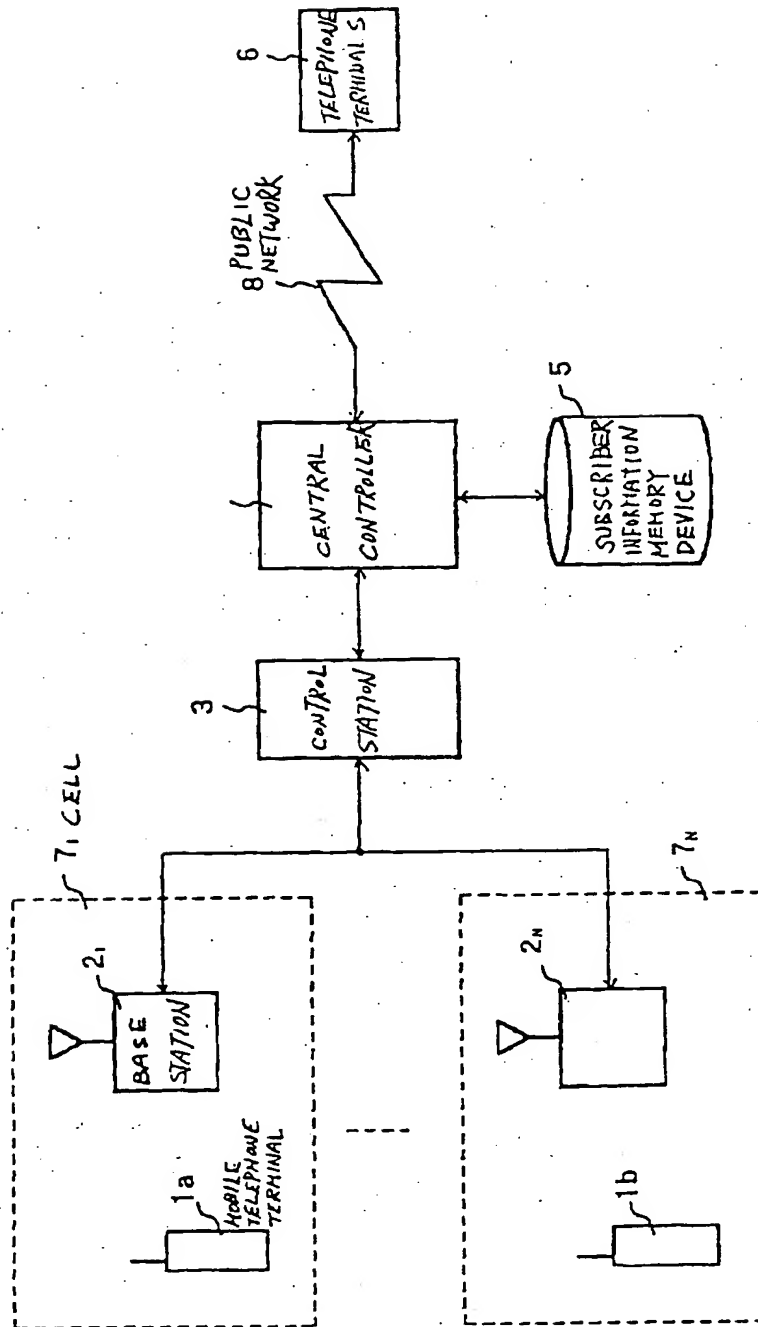


Fig. 2

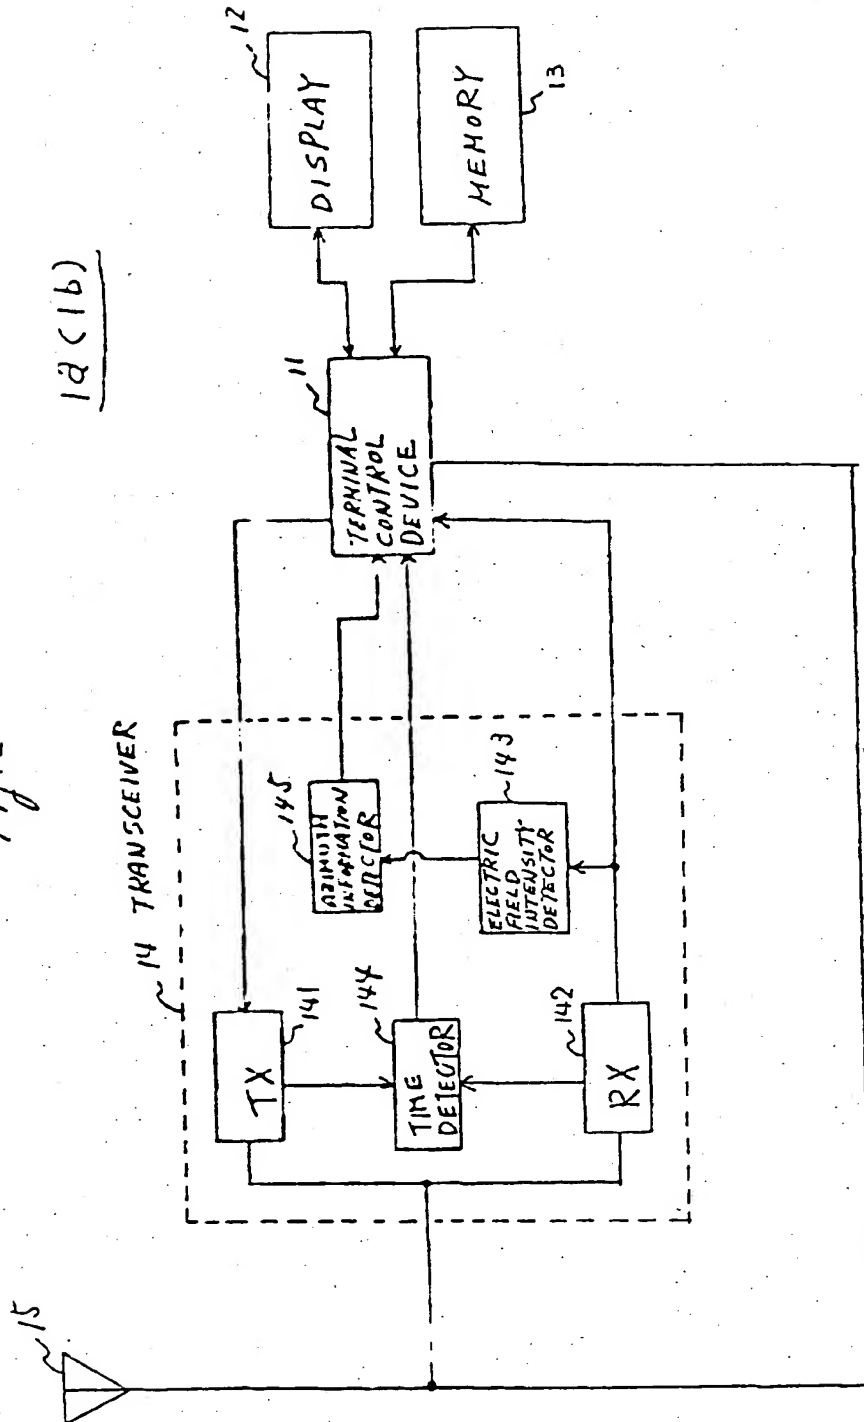


Fig. 4

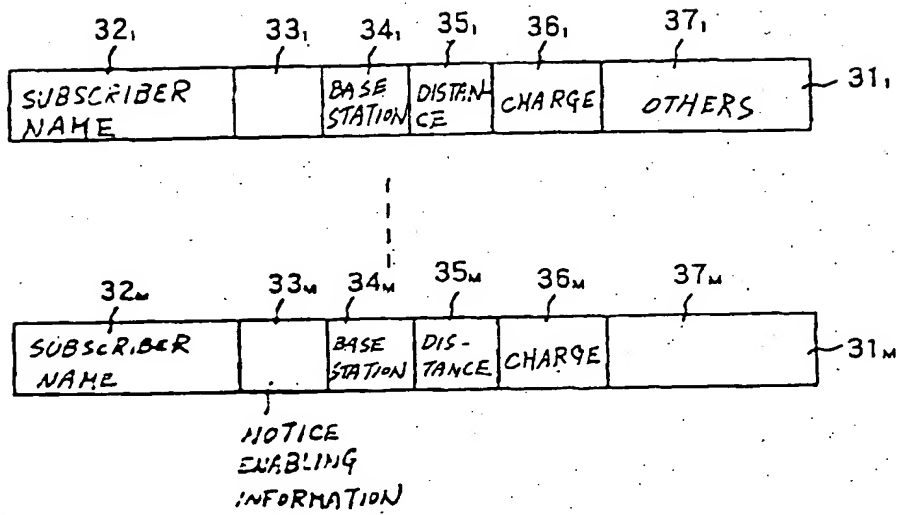


Fig. 3


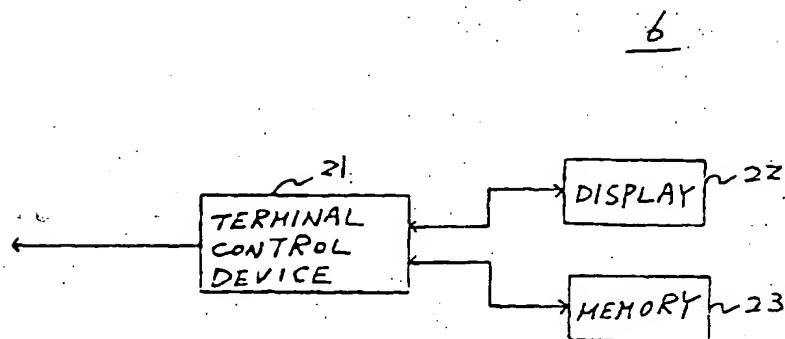


Fig. 5



(19)

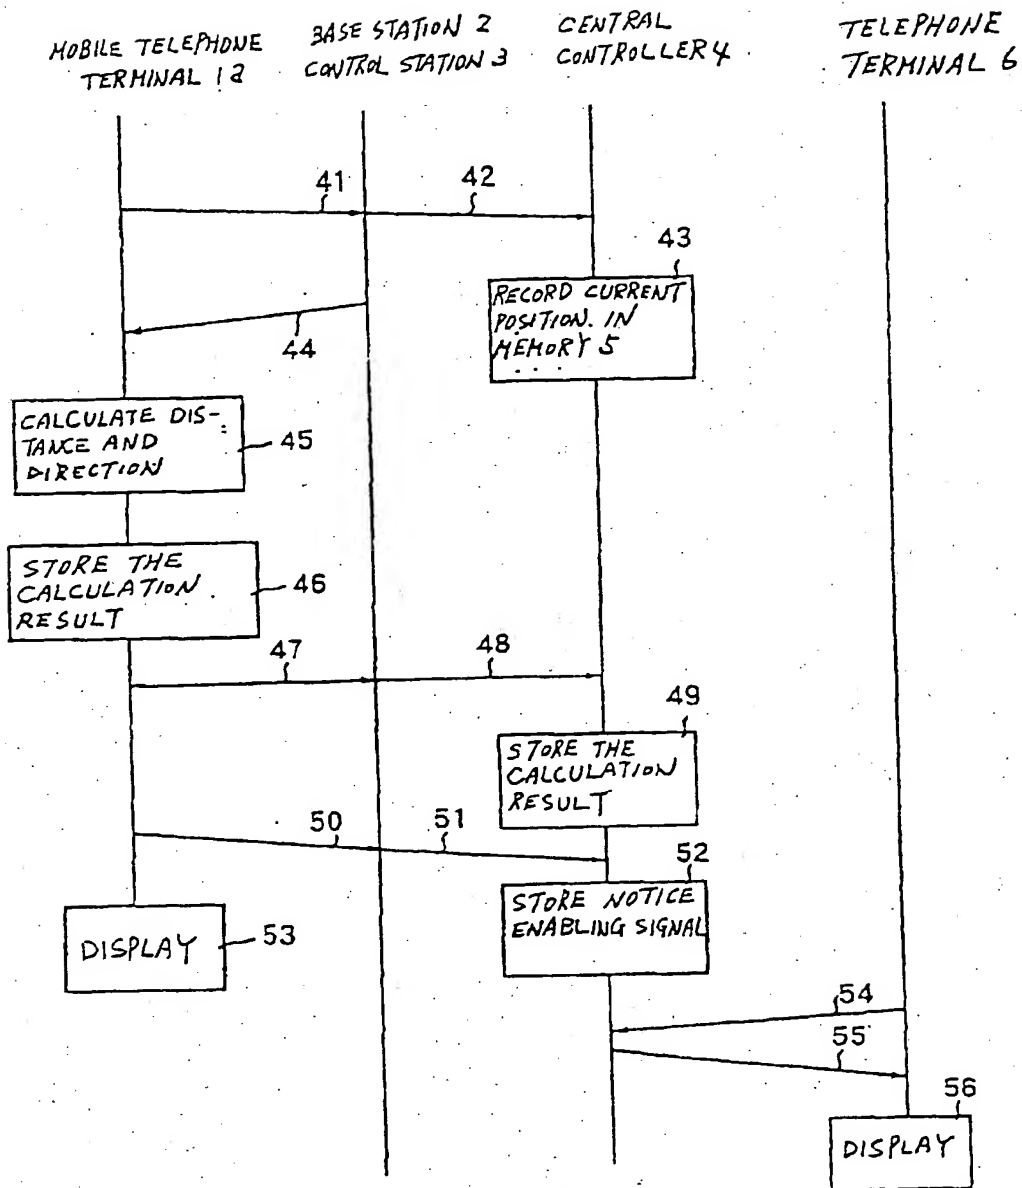

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 713 344 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
06.05.1999 Bulletin 1999/18

(51) Int. Cl.⁶: H04Q 7/38, G01S 5/12

(43) Date of publication A2:
22.05.1996 Bulletin 1996/21

(21) Application number: 95117926.6

(22) Date of filing: 14.11.1995

(84) Designated Contracting States:
DE FR GB

(30) Priority: 15.11.1994 JP 280203/94

(71) Applicant: NEC CORPORATION
Tokyo (JP)


(72) Inventor:
Ishii, Katsuhiro,
c/o NEC Corporation
Tokyo (JP)

(74) Representative:
Glawe, Delfs, Moll & Partner
Patentanwälte
Postfach 26 01 62
80058 München (DE)

(54) Mobile radio communication system

(57) In response to a position registration request transmitted from a mobile telephone terminal 1a (or 1b), at least one base station 2₁ (or 2_N) selected by the mobile telephone terminal transmits a response signal to the mobile telephone terminal and measures a receiving electric field strength of the received response signal and a time between the transmission of the position registration request and the reception of the response signal. The mobile telephone terminal calculates a distance between it and the base station and a direction to the base station on the basis of the measured electric field strength and the measured time and

displays the results of calculation. The mobile telephone terminal reports the results of calculation to a central controller 4 through the base station and a control station 3 to store it in a portion of a subscriber information memory 5 corresponding thereto. The central controller 4 reads out a stored information from the subscriber information memory 5 in response to a notice request from the fixed telephone terminal 6 and notifies it to the fixed telephone terminal 6 to display it on a display device of the latter.

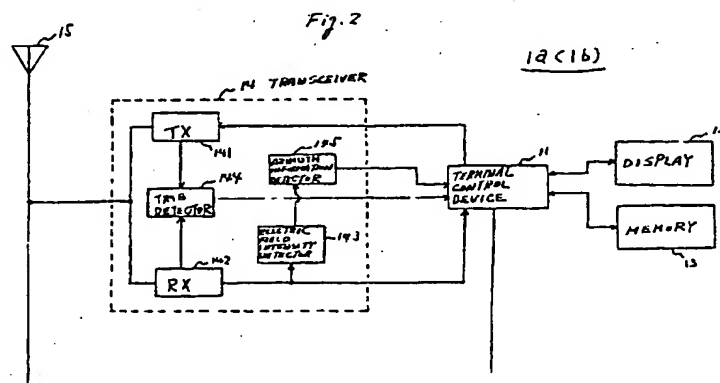

EP 0 713 344 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 11 7926

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	DE 38 27 352 A (BOSCH GMBH ROBERT) 15 February 1990	1,2,9, 10, 20-22, 25-27	H04Q7/38 G01S5/12
A	* the whole document *	8,16,24, 28	
Y	US 4 823 137 A (MALLICK BRIAN C) 18 April 1989	1,2,9, 10, 20-22, 25-27	
A	* column 2, line 3 - line 47 * * column 3, line 12 - column 4, line 33 * * column 5, line 15 - line 60 *	4,5,7, 12,13,15	
A	EP 0 341 738 A (AEG ; DAIMLER BENZ AG (DE); MOTOROLA GMBH (DE), PHILIPS PATENTVERWA) 15 November 1989	18,30	
A	* the whole document *		
A	US 5 327 144 A (STILP LOUISE A ET AL) 5 July 1994	17,29	
	* column 3, line 24 - column 9, line 37 *		
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		9 March 1999	Baas, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X particularly relevant if taken alone Y particularly relevant if combined with another document of the same category A technological background O non-written disclosure D intermediate document</p> <p>T theory or principle underlying the invention E earlier patent document, but published on, or after the filing date D document cited in the application L document cited for other reasons 3 member of the same patent family corresponding document</p>			

EP FORM 1503 03 B2 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 95 11 7926

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-03-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 3827352	A	15-02-1990	NONE		
US 4823137	A	18-04-1989	NONE		
EP 0341738	A	15-11-1989	DE	3816377 A	23-11-1989
			AT	154982 T	15-07-1997
			DE	58909805 D	07-08-1997
US 5327144	A	05-07-1994	AT	165169 T	15-05-1998
			AU	677292 B	17-04-1997
			AU	6094094 A	12-12-1994
			AU	6820694 A	12-12-1994
			BR	9406463 A	30-01-1996
			CA	2161333 A,C	24-11-1994
			DE	69409645 D	20-05-1998
			DE	69409645 T	06-08-1998
			EP	0700525 A	13-03-1996
			JP	2843951 B	06-01-1999
			JP	8508381 T	03-09-1996
			SG	48730 A	18-05-1998
			WO	9427160 A	24-11-1994
			WO	9427161 A	24-11-1994
			US	5608410 A	04-03-1997
			ZA	9401019 A	25-08-1994

THIS PAGE BLANK (USPTO)